

Buffers™



Features

Circular and rectangular types are easily fitted. Reduction of transmitted shock loads enables equipment to be designed more economically.

The rising stiffness properties enable vehicle suspension characteristics to be optimised.




ANB - R is made in oil and chemical resistant Nitrile Rubber.

Metalastik® type Buffers™

Buffers are designed to protect structures and equipment from impact forces. They are usually fitted as non-metallic stops or incorporated in vehicle suspension systems to provide progressive stiffening under increasing load.

Typical applications:


- ▼ Cranes
- ▼ Dump trucks
- ▼ Off-road vehicles
- ▼ Handling equipment
- ▼ Vehicle suspensions

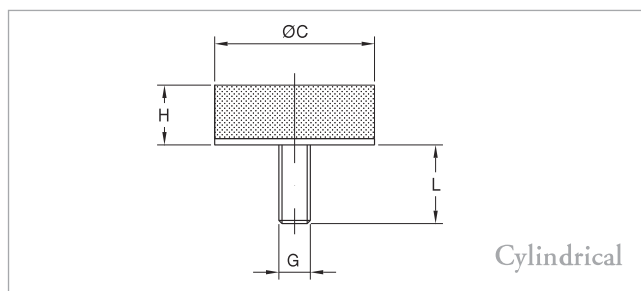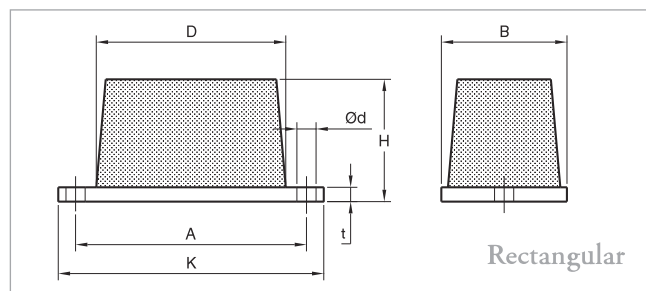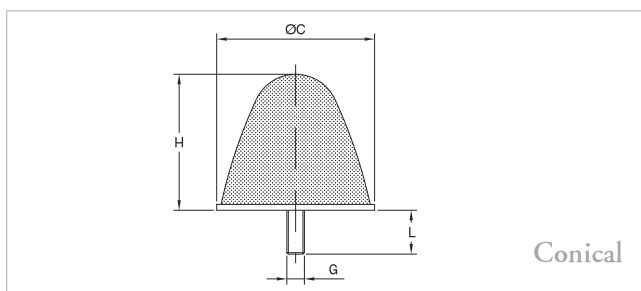



Type	Drawing no.	Part no.	Dimensions in mm							Weight (Kg)
Cylindrical buffers	15-3463	10-00341	C				H	G	L	0,2
	15-3464	10-00342	32				21	M8	20	0,05
	15-3459	10-00337	51				19	M10	25	0,1
Cylindrical buffers	15-3462	10-00340	28,5				37	M6	15	0,03
	19-0604	20-00686	32				28,5	M8	20	0,04
	15-3461	10-00339	38				38	M8	20	0,06
	15-3435	10-00334	48				51	M10	25	0,12
	15-3460	10-00338	70				46	M12	30	0,27
	15-3445	10-00336	108				95	M12	30	0,79
	15-3443	10-00335	108				121	M12	30	0,99
Rectangular buffers	15-0437	10-00322	K	A	B	H	D	d	t	0,48
	15-0238	10-00315	121	105	48	56	86	8,6	6,3	0,55
	15-0260	10-00317	156	127	64	37	89	13,5	6,3	0,57
	ANB R50*	19-0564	84	68,5	32	22	51	6,7	3	0,06

Buffers™

Cylindrical

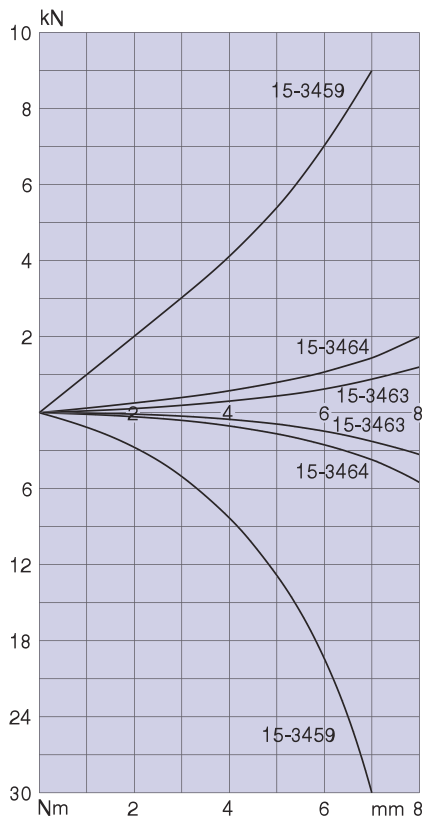

Rectangular

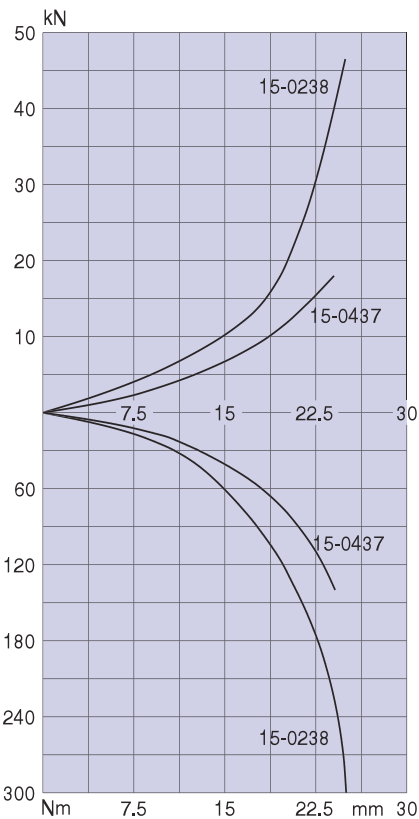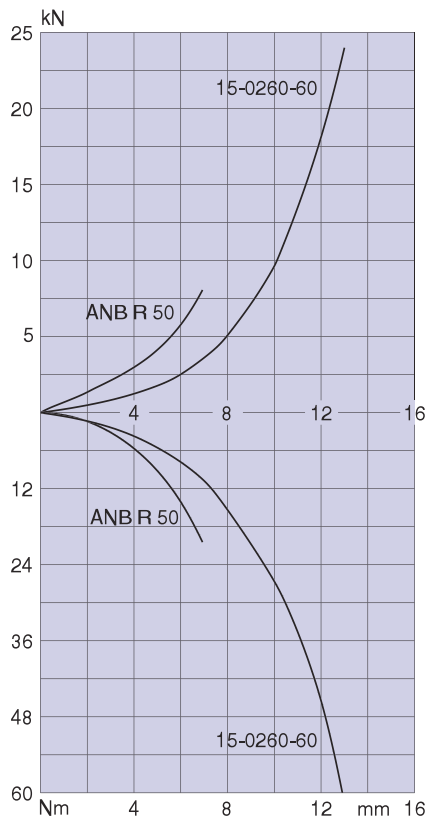

Conical

